




# OWL WATERPROOFING

THE WISE CHOICE

## Composite Deck Balcony with The Lava 20 System

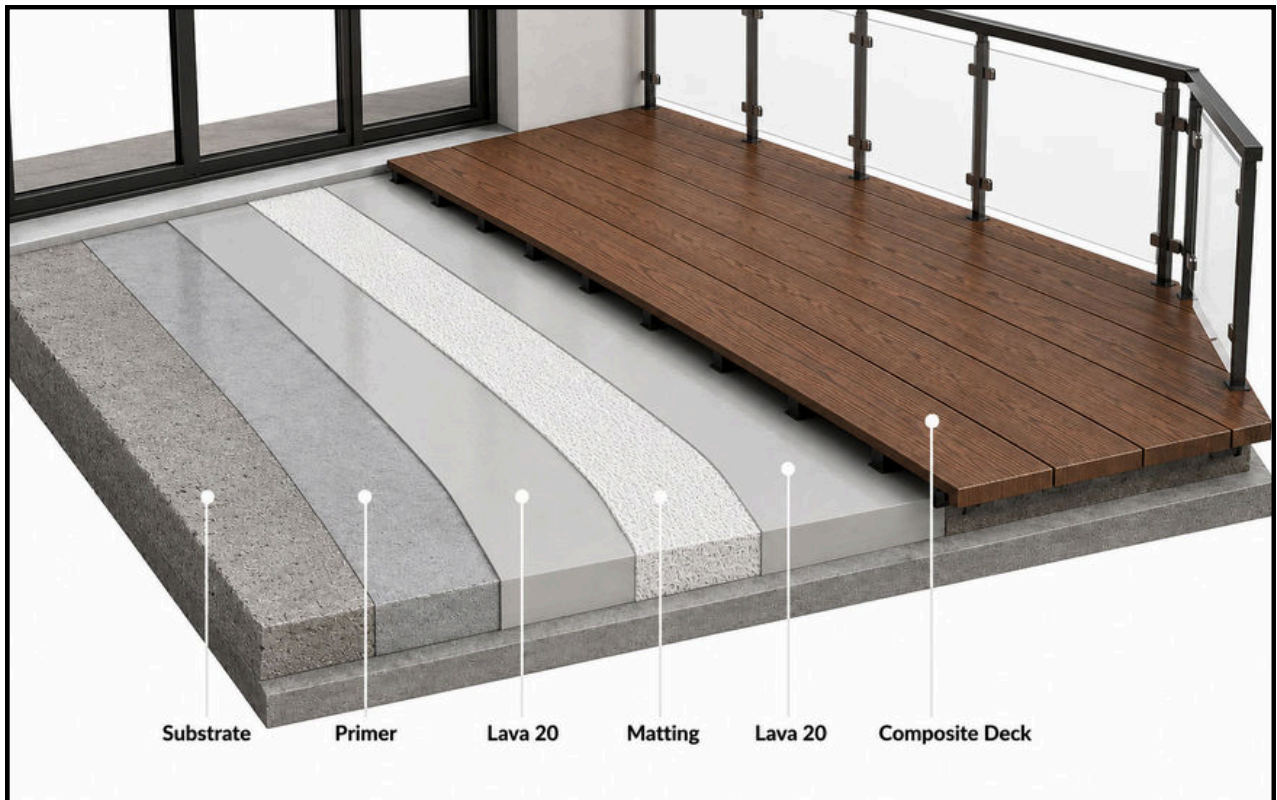



# OWL WATERPROOFING

## THE WISE CHOICE

### **RECOMMENDED BUILD-UP:**

1. Prepare the substrate in accordance with the selected waterproofing membrane TDS.
2. Prime the surface using a suitable primer depending on substrate and conditions (e.g. Lava 20 Fast Primer or Lava 20 2-Part Epoxy Primer for concrete).
3. Apply the first coat of Lava 20.
4. Reinforce with Lava 20 Chopped Strand Matting.
5. Apply the second coat of Lava 20.
6. Install compatible pedestal or batten support systems over the cured membrane.

---

### **NOTES:**

- Recommended Lava 20 consumption for Composite Deck Balcony applications: approx. **3.0-3.5 kg/m<sup>2</sup>**. Adjust coat thickness and number of layers as required.
- Lava 20 Catalyst can be used to increase application thickness per coat and enable wet-on-wet application (refer to application guidelines).
- Do not apply during rain, frost, or standing water conditions.
- Application temperature: +5°C to +35°C

